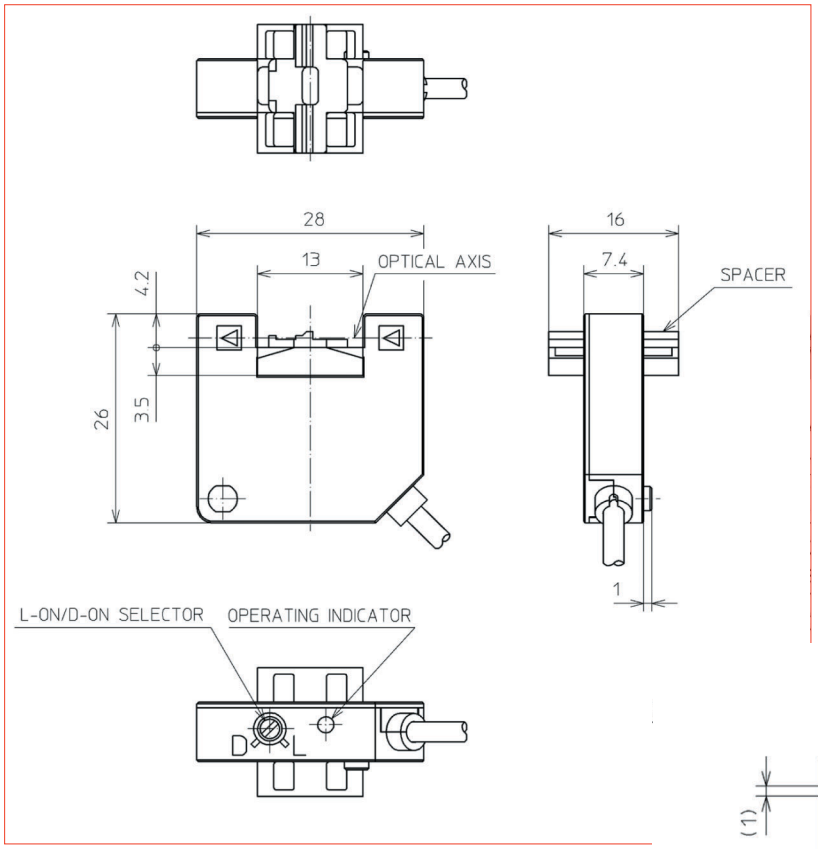
28
13
OPTICAL AXIS
4.2
3.5
26
16
7.4
SPACER
1
L-ON/D-ON SELECTOR
OPERATING INDICATOR
D
L

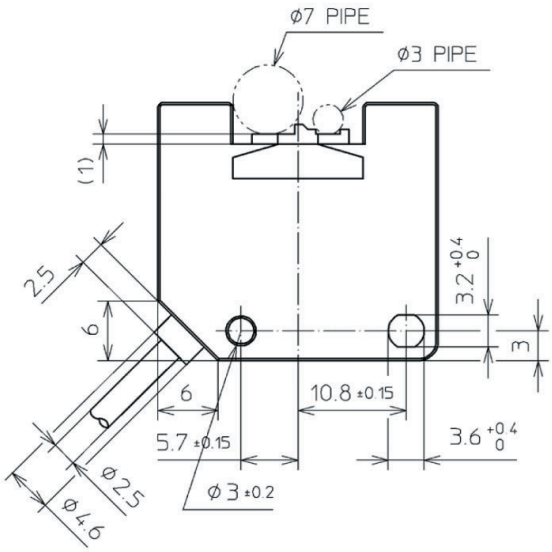
ø7 PIPE
ø3 PIPE
(1)
2.5
6
3.2 +0.4 0
3
6
10.8 ±0.15
5.7 ±0.15
3.6 +0.4 0
ø2.5
ø4.6
ø3 ±0.2

NPN

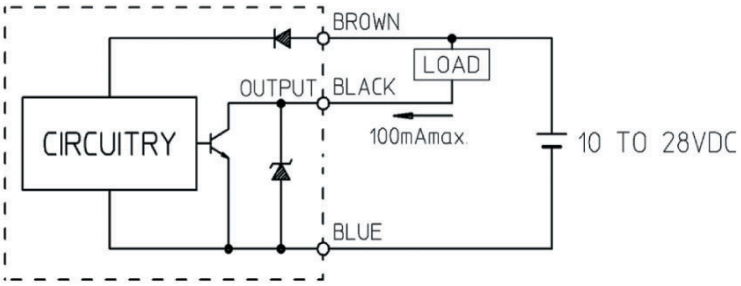
BROWN
LOAD
OUTPUT
BLACK
CIRCUITRY
100mAmax.
10 TO 28VDC
BLUE

PNP

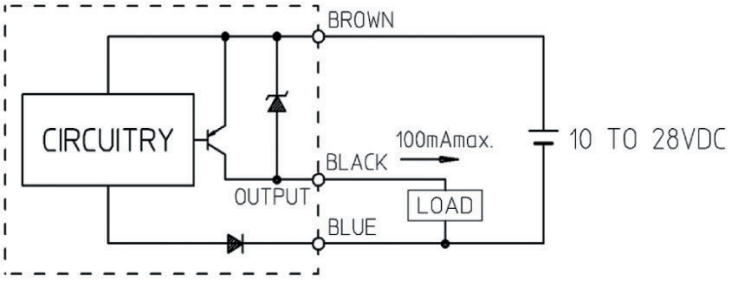
BROWN
CIRCUITRY
100mAmax.
10 TO 28VDC
BLACK
OUTPUT
LOAD
BLUE